

VFRack

DATASHEET: LW240115 v2

REFERENCE	DESCRIPTION	COLOR	PCS
MUR9U66	Cool rolled steel Tempered smoky-gray glass with thickness of 5mm.	BLACK	1 PC

MUR9U66




Widely used in networking, educational and broadcasting systems, as well as in telecommunications. Suitable for placing server computers and precision electronic equipments.

APPLICATION

- Smoky-gray glass front door.
- Easily mounted on walls, can also be placed on floor after installing the frame or feet.
- **Loading capacity:** 60KG.
- Top and bottom wiring channel could be closed.
- Removable front door and side panels, easy to install and maintain.
- Surface finish: Degreased, acid cleaned, phosphoric, water cleaned, electro-static powder coating, meet ROHS standard.

PRODUCT DIMENSIONS

mm Unit of Measurement:mm

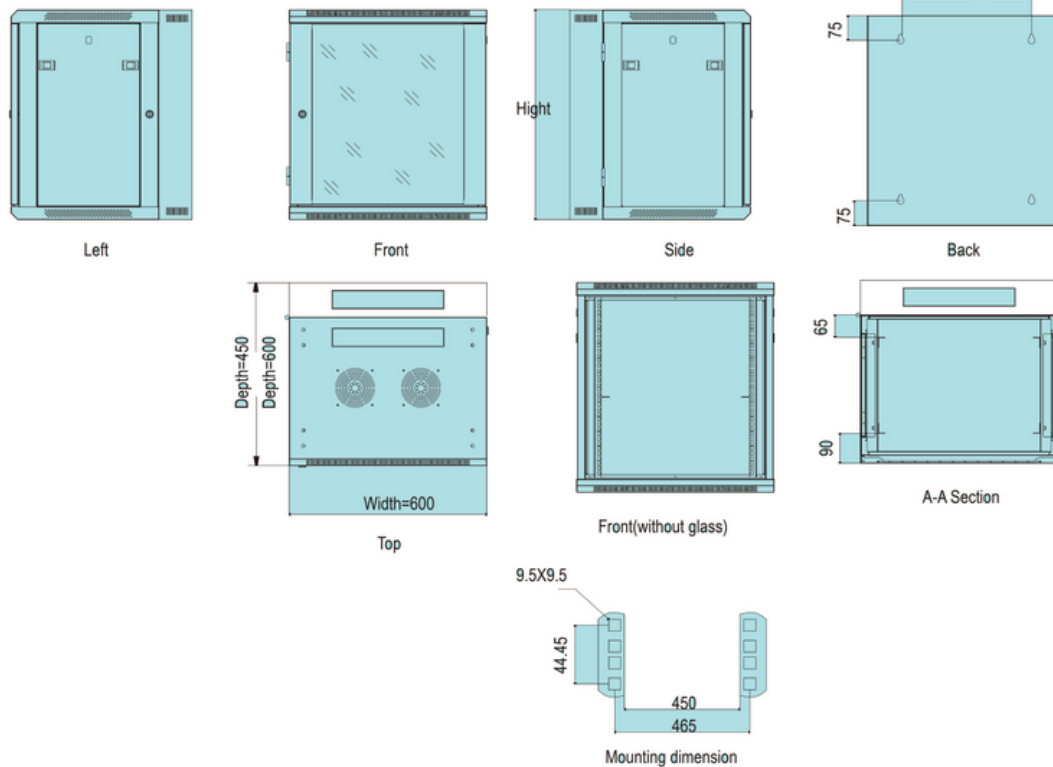

ACCESSORIES

S/N	SPECIFICATION	PCS	UDS	MATERIAL	SURFACE FINISH	REMARK
1	Frame	4	PCS	1.2mm cold rolled steel	Powder coated	
2	Front door	1	PCS	1.2mm cold rolled steel	Powder coated	B type door
3	Side door	2	PCS	1.2mm cold rolled steel	Powder coated	With lock
4	Back door	1	PCS		Powder coated	
5	Lock	1	PCS	1.5mm cold rolled steel		
6	Mounting rail	4	PCS	1.2mm cold rolled steel	Powder coated	
7	Mounting plate	1	PCS	1.2mm cold rolled steel	Powder coated	
8	Cable inlet cap	2	PCS		Powder coated	
9	Screws & Nuts	10	Packs			
10	Wrench	1	PCS			

CONSTRUCTION

PART No.	U	WIDTH	DEPTH	HEIGHT	CARTON MEASUREMENT
MUR6U66	6	600MM	600MM	368MM	0.67m x 0.62m x 0.43m
MUR9U66	9	600MM	600MM	501MM	0.67m x 0.62m x 0.56m
MUR12U66	12	600MM	600MM	635MM	0.67m x 0.62m x 0.70m
MUR15U66	15	600MM	600MM	789MM	0.67m x 0.62m x 0.83m
MUR18U66	18	600MM	600MM	901MM	0.67m x 0.62m x 0.96m

